


GENERAL NOTES - DRIP DISPOSAL

1. ALL INSTALLATION AND CONSTRUCTION TECHNIQUES SHALL CONFORM TO COUNTY CODES AND STATE BOARD OF HEALTH "SEWAGE HANDLING AND DISPOSAL REGULATIONS" PERTAINING TO ON SITE SEWAGE SYSTEMS AND THE PERMIT FOR THIS SITE.
2. THE INSTALLATION OF THIS SYSTEM SHALL BE IN ACCORDANCE WITH SPECIFICATIONS AND PROCEDURES AS SUPPLIED BY THE MANUFACTURER OF THE EQUIPMENT.
3. ALL PVC PIPE AND FITTINGS SHALL BE PVC SCH 40 TYPE 1 RATED FOR PRESSURE APPLICATIONS. ALL GLUED JOINTS SHALL BE CLEANED AND PRIMERED WITH PURPLE (DYED) PVC PRIMER PRIOR TO BEING GLUED.
4. ALL CUTTING OF PVC PIPE, FLEXIBLE PVC AND DRIPPER TUBING SHALL BE ACCOMPLISHED WITH PIPE CUTTERS APPROVED BY THE MANUFACTURER. NO SAWING OF PVC, FLEXIBLE PVC OR DRIPPER TUBING ALLOWED.
5. ALL PVC PIPE, FLEXIBLE PVC AND DRIPPER TUBING IN THE WORK AREA SHALL HAVE THE ENDS COVERED WITH DUCT TAPE TO PREVENT CONSTRUCTION DEBRIS FROM ENTERING THE PIPE. PRIOR TO GLUING ALL JOINTS SHALL BE INSPECTED FOR AND CLEARED OF ANY CONSTRUCTION DEBRIS.
6. NO WET WEATHER INSTALLATION IS PERMITTED.
7. NO ACTIVITY ON DRAINFIELD EQUIPMENT OTHER THAN MINIMUM REQUIRED TO INSTALL SYSTEM, DO NOT PARK EQUIPMENT, DRIVE OR OPERATE EQUIPMENT OVER, OR STORE MATERIALS ON DRAINFIELD SITE.
8. HORIZONTAL SLOPING BETWEEN DRIPPER LINES AND THE INSTALLATION DEPTH SHALL AS BE SPECIFIED.
9. THE BUILDING SEWER SHALL BE A 4" SCH40 PVC WITH A MINIMUM SLOPE OF 1/4" PER FOOT. THERE SHALL BE NO BENDS GREATER THAN 45 DEGREES. CLEANOUTS SHOULD BE PROVIDED AT EVERY 25 FEET.
10. FOR CONSTRUCTION TECHNIQUES REFER TO THE "SEWAGE HANDLING AND DISPOSAL REGULATIONS". IF TREES ARE TO BE REMOVED FOR THE SITE, CUT STUMPS FLUSH WITH GROUND. REMOVE BY HAND.
11. GRAVEL BASE AND CENTRAL CONTROL UNIT IS TO BE DRAINED VIA 2" PVC PIPE, SCREENED AT INLET AND OUTLET, DISCHARGE TO BE AT GRADE DOWN SLOPE (TO ENSURE DRAINAGE OF SURFACE WATER FROM UNIT).
12. THE CONTRACTOR SHALL BE CERTIFIED TO INSTALL THIS TYPE OF SYSTEM BY THE MANUFACTURER AND SHALL HOLD A PRE CONSTRUCTION MEETING WITH THE INDIVIDUALS RESPONSIBLE FOR SOIL EVALUATION, PERMITTING AND INSPECTIONS PRIOR TO SITE WORK BEGINNING TO INSURE PROTECTION OF THE SITE CONDITIONS AND TO ENSURE THE SYSTEM IS INSTALLED ACCORDING TO DESIGN.
13. IF SITE CONDITIONS ARE DETERMINED TO REQUIRE THE INSTALLATION OF THE SYSTEM TO DEVIATE FROM THESE PLANS, ALL SITE WORK SHALL STOP IMMEDIATELY AND THE DESIGNER SHALL BE NOTIFIED.
14. ANY ONGOING WORK SHALL BE AT THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
15. DRAINFIELD SUPPLY AND RETURN LINES TO BE INSTALLED AT ADEQUATE DEPTH TO PREVENT FREEZING.

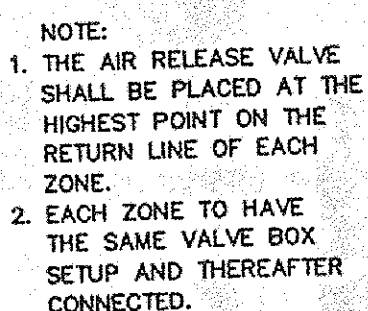

SCOPE: DOMESTIC SEWAGE WILL FLOW BY GRAVITY THROUGH THE SEPTIC TANK THEN INTO A FINAL DOSING TANK. THE CENTRAL UNIT WILL DISPOSE OF THE EFFLUENT BY ALTERNATELY DOSING MULTIPLE ZONES IN THE ABSORPTION AREA.

THE CENTRAL UNIT COMPRISES BOTH THE CONTROL AND THE HYDRAULIC UNITS.

AMERICAN MANUFACTURING CO.

PROJECT NAME:	DR. BY:	DATE:
	CK. BY:	DATE:
	APP. BY:	DATE:
	TITLE:	
COUNTY:	COVER SHEET	

FILE:	SCALE:	SHEET OF
-------	--------	----------





AMERICAN MANUFACTURING CO.
2515 WASHINGTON RD. GAINESVILLE VA 20155: 703-754-0077

PROJECT NAME:	DR. BY:	DATE:
	CK. BY:	DATE:
	APP. BY:	DATE:
COUNTY:	TITLE:	
	Hydraulic Profile	
	& Price Detail	

FILE:	SCALE:	SHEET	OF
-------	--------	-------	----

5. COVER ENTIRE 16.5' x 170' AREA OF DRAINFIELD WITH A MINIMUM COVER OF 6" OF TOPSOIL WITH A TURTLE-BACK GRADE FOR POSITIVE DRAINAGE.

6. AN AGGRESSIVE TURF COVER OVER ENTIRE 16.5' x 170' AREA IS RECOMMENDED. (PREFERABLY SOD).



BASAL AREA: $6.5' \times 170' = 1105$ sqft
 BASAL AREA LOADING: 0.13 gpd/sqft
 SAND BED: $____ \times ____ = ____$ sqft
 SAND BED LOADING: $____$ gpd/sqft
 DRIP TUBING: $10 \times 170' = 1700$ L.F.
 ZONE 1: 5 runs $\times 170' = 850$ L.F.
 ZONE 2: 5 runs $\times 170' = 850$ L.F.
 LANDSCAPE LINEAR LOAD: 0.13 gpd/L.F.

AMERICAN MANUFACTURING COMPANY INC
5517 WELLINGTON ROAD, GAINESVILLE VA 20155 PHONE : 703-754-0077

PROJECT NAME :	DRAFTER	DATE
	CHECKED	DATE
	APPROVED	DATE
COUNTY :	TITLE : TREATMENT SCHEMATIC	

DESIGNED BY:			
FILE: F:\ACAD\PACK99\CARR	SCALE: NTS	SHEET OF	

CAPACITY GAL.	A	B	C	D	E	F
2000	5'-6"	4'-2"	1'-4"	3'-7"	3'-11"	1'-7"
2250	5'-6"	4'-7"	0'-11"	4'-0"	4'-4"	1'-2"
2500	6'-4"	5'-0"	1'-4"	4'-6"	4'-9"	1'-7"
3000	7'-4"	5'-11"	1'-5"	5'-4"	5'-8"	1'-8"
3500	8'-4"	6'-9"	1'-7"	6'-2"	6'-6"	1'-10"
4000	9'-4"	7'-8"	1'-8"	7'-1"	7'-5"	1'-11"
5000	10'-4"	9'-5"	0'-11"	8'-10"	9'-2"	1'-2"



NOTES

A) 18" DIA. CONC. PLUG WITH HANDLE IS STANDARD EQUIPMENT.

B) 18" DIA. CONC. RISER, 15" OR 24" HIGH WITH CON. LID IS OPTIONAL AT AN EXTRA CHARGE.

THE CONCRETE RISER ON THE OUTLET END WILL HAVE A MINIMUM 24" INSIDE DIAMETER.

2,000 5,000 GALLON SEPTIC TANKS

SCALE: NONE	APPROVED BY:	DRAWN BY: T.A.S.
DATE: 9/23/77		REVISED:

ADAM INDUSTRIES, INC.
MACK INDUSTRIES, INC.

VALLEY CITY OHIO 44280

[illegible]

3	1	SITE PLAN
4	2	SITE PLAN
5	3	SITE PLAN
6	4	SITE PLAN
7	5	SITE PLAN
8	6	SITE PLAN
9	7	SITE PLAN
10	8	SITE PLAN
11	9	SITE PLAN
12	10	SITE PLAN
13	11	SITE PLAN
14	12	SITE PLAN
15	13	SITE PLAN
16	14	SITE PLAN
17	15	SITE PLAN
18	16	SITE PLAN
19	17	SITE PLAN
20	18	SITE PLAN
21	19	SITE PLAN
22	20	SITE PLAN
23	21	SITE PLAN
24	22	SITE PLAN
25	23	SITE PLAN
26	24	SITE PLAN
27	25	SITE PLAN
28	26	SITE PLAN
29	27	SITE PLAN
30	28	SITE PLAN
31	29	SITE PLAN
32	30	SITE PLAN
33	31	SITE PLAN
34	32	SITE PLAN
35	33	SITE PLAN
36	34	SITE PLAN
37	35	SITE PLAN
38	36	SITE PLAN
39	37	SITE PLAN
40	38	SITE PLAN
41	39	SITE PLAN
42	40	SITE PLAN
43	41	SITE PLAN
44	42	SITE PLAN
45	43	SITE PLAN
46	44	SITE PLAN
47	45	SITE PLAN
48	46	SITE PLAN
49	47	SITE PLAN
50	48	SITE PLAN
51	49	SITE PLAN
52	50	SITE PLAN
53	51	SITE PLAN
54	52	SITE PLAN
55	53	SITE PLAN
56	54	SITE PLAN
57	55	SITE PLAN
58	56	SITE PLAN
59	57	SITE PLAN
60	58	SITE PLAN
61	59	SITE PLAN
62	60	SITE PLAN
63	61	SITE PLAN
64	62	SITE PLAN
65	63	SITE PLAN
66	64	SITE PLAN
67	65	SITE PLAN
68	66	SITE PLAN
69	67	SITE PLAN
70	68	SITE PLAN
71	69	SITE PLAN
72	70	SITE PLAN
73	71	SITE PLAN
74	72	SITE PLAN
75	73	SITE PLAN
76	74	SITE PLAN
77	75	SITE PLAN
78	76	SITE PLAN
79	77	SITE PLAN
80	78	SITE PLAN
81	79	SITE PLAN
82	80	SITE PLAN
83	81	SITE PLAN
84	82	SITE PLAN
85	83	SITE PLAN
86	84	SITE PLAN
87	85	SITE PLAN
88	86	SITE PLAN
89	87	SITE PLAN
90	88	SITE PLAN
91	89	SITE PLAN
92	90	SITE PLAN
93	91	SITE PLAN
94	92	SITE PLAN
95	93	SITE PLAN
96	94	SITE PLAN
97	95	SITE PLAN
98	96	SITE PLAN
99	97	SITE PLAN
100	98	SITE PLAN
101	99	SITE PLAN
102	100	SITE PLAN
103	101	SITE PLAN
104	102	SITE PLAN
105	103	SITE PLAN
106	104	SITE PLAN
107	105	SITE PLAN
108	106	SITE PLAN
109	107	SITE PLAN
110	108	SITE PLAN
111	109	SITE PLAN
112	110	SITE PLAN
113	111	SITE PLAN
114	112	SITE PLAN
115	113	SITE PLAN
116	114	SITE PLAN
117	115	SITE PLAN
118	116	SITE PLAN
119	117	SITE PLAN
120	118	SITE PLAN
121	119	SITE PLAN
122	120	SITE PLAN
123	121	SITE PLAN
124	122	SITE PLAN
125	123	SITE PLAN
126	124	SITE PLAN
127	125	SITE PLAN
128	126	SITE PLAN
129	127	SITE PLAN
130	128	SITE PLAN
131	129	SITE PLAN
132	130	SITE PLAN
133		

BARCOCK, JONES AND ASSOCIATES, INC
CIVIL ENGINEERS - SURVEYORS - LAND PLANNERS
RAINESVILLE OHIO 44077

BARB COCK, DONALD E. & ASSOCIATES
LOT No. 1 & 2, LAKE FISHER, TOWN OF PAINESVILLE
14760 PAINESVILLE ENGINEERING, LOT No. 1 & LOT No. 2
14760 PAINESVILLE WARREN ROAD (P.P. # 7A-14-5)
LEROY TOWNSHIP LAKE COUNTY STATE OF OHIO